


NORMACONNECT® V-QRC



Unique quick release closure for rapid assembly

- ✓ Threaded trunnions enable installation with one hand
- ✓ Lightweight connection compared to bolted joint
- ✓ Adaptable to flanges which are slightly out of tolerance



Air Intake & Induction



Exhaust Systems



Cooling Systems



Fuel & Oil Systems



Turbocharger Installations




Fixing & Retaining

V-PROFILE CLAMPS



NORMACONNECT® V-QRC

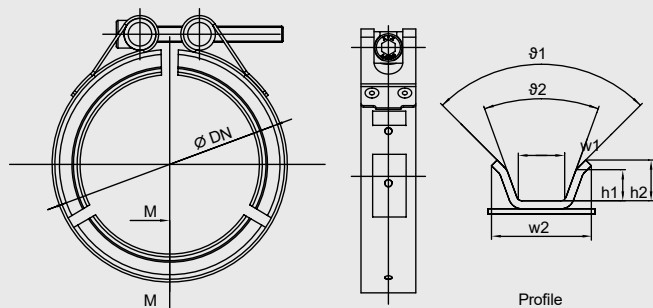

Applications

The V-QRC Clamps are used in different segments of exhaust systems as well as turbocharger installations and offer excellent corrosion resistance properties.

Material

Group	W3	W4	W5
Band & profile	1.4510	1.4301	1.4571
Screw	A2-70/A4-80		
Trunnions	1.4305		

Part number	Description	Ø DN (mm)	Packaging quantity (pcs)	Profile dimensions					
				w1 (mm)	w2 (mm)	h1 (mm)	h2 (mm)	ϑ1	ϑ2
NORMACONNECT® V-QRC									
0633 0580 077	V-QRC 077 096	77	25	6.6	-	4.7	-	40°	-
0633 0578 077	V-QRC 077 869	77	25	8.2	17.0	4.0	-	40°	-
0633 1579 080	V-QRC 080 897	80	25	4.5	13.6	5.8	7.5	40°	70°
0633 0577 080	V-QRC 080 2-0121	80	25	8.7	-	5.8	7.6	40°	90°
0633 2633 082	V-QRC 082 0885	82	25	4.3	13.6	4	7.0	40°	-
0633 1576 085	V-QRC 085 908	85	25	9.0	-	7.0	-	40°	-
0633 1575 097	V-QRC 097 099	97	25	7.9	-	5.2	-	40°	-
0633 3633 098	V-QRC 098 917	98	25	8.8	-	5.4	7.5	40°	90°
0633 1574 103	V-QRC 103 097	103	25	6.5	-	3.6	5.05	40°	90°
0633 2633 108	V-QRC 108 0884	108	25	13.6	-	4.0	7.0	40°	-
0633 4633 112	V-QRC 112 015/P	112	25	6.5	-	7.8	-	40°	-
0633 2633 115	V-QRC 115 933	115	25	7.9	-	5.4	7.8	40°	90°
0633 0571 124	V-QRC 124 094	124	25	6.5	-	4.6	-	40°	-
0633 4633 131	V-QRC 131 110/N4	131	25	6.5	20.0	7.2	-	40°	-
0633 4633 135	V-QRC 135 015/P	135	25	6.5	-	7.8	-	40°	-
0633 1633 143	V-QRC 143 101.D4	143	25	7.9	-	5.8	7.5	40°	90°
0633 4633 145	V-QRC 145 015/P	145	25	6.5	-	7.8	-	40°	-
0633 4633 146	V-QRC 155 110/N4	146	25	6.5	20.0	7.2	-	40°	-
0633 0572 152	V-QRC 152 009	152	25	9.2	-	6.8	-	40°	-
0633 1633 152	V-QRC 152 124/B5	152	25	7.9	-	5.8	7.0	40°	90°
0633 4633 155	V-QRC 155 015/P	155	25	6.5	-	7.8	-	40°	-
0633 2633 179	V-QRC 179 101 D4	179	25	7.9	-	5.3	7.5	40°	90°
0633 1633 185	V-QRC 185 124/B5	185	25	7.9	-	5.8	7.5	40°	90°
0632 4632 317	V-QRC 317	317	25	7.9	-	5.8	7.5	40°	90°
NORMACONNECT® V-STC (with solid trunnion closure)									
0632 2632 219	V-STC 219 101	219	25	7.9	-	5.8	7.5	40°	90°
0632 4632 404	V-STC 404 P 015	404	25	6.5	-	7.8	-	40°	-



Do you have questions or require a personal consultation?

Feel free to contact our Automotive Aftermarket Team! Hotline +44 1635 574 005

Visit our website for more information about our Automotive Aftermarket products: norma-aftermarket.com



NORMA Group Holding GmbH | Edisonstraße 4 | 63477 Maintal | Germany | norma-aftermarket.de

This document supersedes all previous issues. No part of this publication may be reproduced without our prior written consent. In NORMA Group's policy of continual product improvements to meet user needs and technological developments, all models and sets listed in this folder (photographs, specifications, sizes and weights) may be upgraded or discontinued without notice and without any obligation on our part to modify tools or equipment sold previously. The recommendations for use and safety given in this folder do not replace accepted good practice or the safety related legal and regulatory provisions. References to standards implemented as of September 19, 2024 are not contractually binding.