







# NORMACONNECT® VPP Bridge




Designed to withstand extreme temperatures up to 1,050 °C

- ✓ Operates at higher temperatures than conventional profile clamps
- ✓ Quick and easy installation due to spring bridge
- ✓ Higher clamping force than conventional clamps
- ✓ Minimum installation space required

 Air Intake & Induction	 Exhaust Systems
 Cooling Systems	 Fuel & Oil Systems
 Turbocharger Installations	 Fixing & Retaining

## V-PROFILE CLAMPS

### NORMACONNECT® VPP Bridge

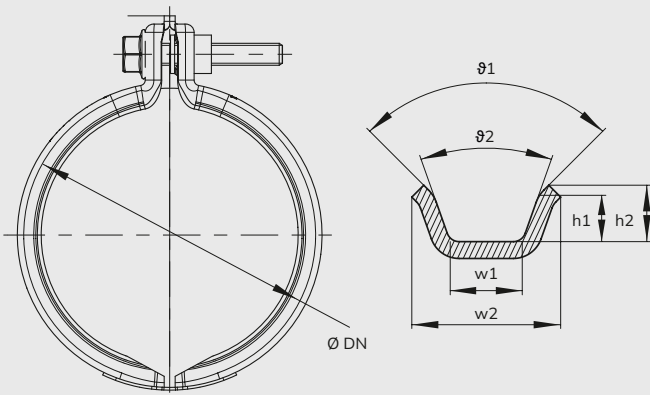

### Applications

The NORMACONNECT® VPP Bridge is used in different segments of exhaust systems as well as turbocharger installations. It is designed for easy and quick installations and high clamping forces.

### Materials

Group	W5
Profile	1.4571/SUS 316Ti
Screw	A2-70
Nut	A2
Spring	1.4310/SUS 301 or 1.4828/SUS 309

Part Number	Description	Ø DN (mm)	Packaging Quantity (pcs)	Profile Dimensions					
				w1 (mm)	w2 (mm)	h1 (mm)	h2 (mm)	Ø1	Ø2
0168 0000 079	VPP Bridge 079	79	25	8.55	17.15	5.5	6.7	39°	90°
0168 0000 083	VPP Bridge 083	83	25	8.55	17.15	5.5	6.7	39°	90°
0168 1000 086	VPP Bridge 086	86	25	8.55	17.15	5.5	6.7	39°	90°
0168 0000 094	VPP Bridge 094	94	25	8.55	17.15	5.5	6.7	39°	90°
0168 0000 096	VPP Bridge 096	96	25	8.55	17.15	5.5	6.7	39°	90°
0168 0000 098	VPP Bridge 098	98	25	8.55	17.15	-	6.0	40°	-
0168 1000 101	VPP Bridge 101	101	25	8.55	17.15	5.8	7.2	39°	90°
0168 0000 107	VPP Bridge 107	107	25	8.55	17.15	5.5	6.7	39°	90°
0168 1000 113	VPP Bridge 113	113	25	8.55	17.15	5.5	6.7	39°	90°
0168 1000 120	VPP Bridge 120	120	25	8.55	17.15	5.5	6.7	39°	90°
0168 1000 138	VPP Bridge 138	138	25	8.55	17.15	5.3	6.7	39°	90°

### More benefits

- ✓ Lack of coverband reduces temperature difference and cost of clamp
- ✓ Movable swivel nut ensures movement of nut along the screw axis leading to less tolerance influences during tightening

NORMACONNECT® VPP Bridge is part of a broad portfolio. Discover more!



NORMACONNECT® V-QRC



NORMACONNECT® CC

**PREMIER** TecDoc® DATA SUPPLIER



Do you have questions or require a personal consultation?

Feel free to contact our Automotive Aftermarket Team!

Visit our website for more information about our Automotive Aftermarket products: [norma-aftermarket.com](http://norma-aftermarket.com)



NORMA Group Holding GmbH | Edisonstraße 4 | 63477 Maintal | Germany | [normagroup.com](http://normagroup.com)

This document supersedes all previous issues. No part of this publication may be reproduced without our prior written consent. In NORMA Group's policy of continual product improvements to meet user needs and technological developments, all models and sets listed in this folder (photographs, specifications, sizes and weights) may be upgraded or discontinued without notice and without any obligation on our part to modify tools or equipment sold previously. The recommendations for use and safety given in this folder do not replace accepted good practice or the safety related legal and regulatory provisions. References to standards implemented as of February 17, 2026 are not contractually binding.